AUTOMATIC WATER SOFTENER CHRONOMETRIC GIX5

TECHNICAL FEATURES

Weight	11 kg
Power supply	230V 50/60 Hz
Optional	120V 60 Hz
Max flow rate suggested	1500 l/h
Room temperature	Min 4°C Max 35°C
Absorbet power	4 W
Salt quantity for regeneration cycle	0.6 kg
Salt refill	10 kg

THE PACKAGING CONTAINS

-1 255/740 Logix Autotrol Valve
-1 Brine tank
-1 Vessel 5 litres with 3.litres cationic resins adapt for softening
-1 Instruction manual
-3 Metres of unloading pipe
-1 Overflow curved union joint
-1 Drain connection
-1 Grid

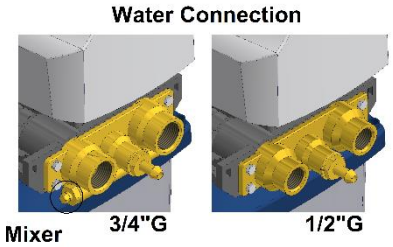

LITRES OF SOFT WATER BASED ON WATER HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m^3.°f
°d	11	16	22	28	33	
ppm $CaCO_3$	200	300	400	500	600	
GIX5	**1050**	**700**	**525**	**420**	**350**	**21.0**

ORDER CODE:

ACX02A = AUTOMATIC SOFTENER GIX5 1/2”G AC
ACX05A = AUTOMATIC SOFTENER GIX5 3/4”G MIX AC

ORDER CODE WITH ANTI-OVERFLOW DEVICE (OPTIONAL):

ACX02AG = AUTOMATIC SOFTENER GIX5 1/2”G AC NG
ACX05AG = AUTOMATIC SOFTENER GIX5 3/4”G MIX AC NG

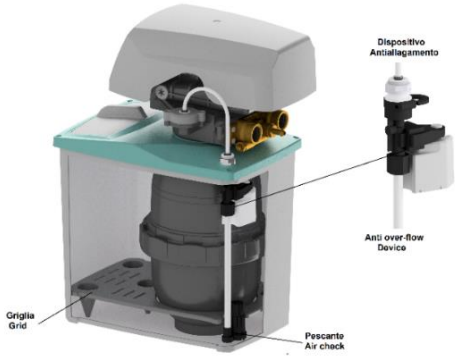

OPTIONAL
Chlorine generator device and salt alarm

ORDER CODE: T14-1



CHARACTERISTICS OF FEED WATER:
Feed water must be:
-Drinkable and clean (SDI1)
-Temperature must be between 6°C and 25°C
-Pressure of feed water 0,2 ÷ 0,8 Mpa (2÷8 bar)
-Hardness must be below 900 ppm $CaCO_3$ (90°f)